

Hybrid Combiner (15kW)

Product Specifications

HC-15K-UHF-158

Part Number: 200812.01



Main Features

- Copper, Silver-plated Brass, and High-Quality Aluminum Alloy
- High Isolation
- Compact Design
- Custom Design is Available

Electrical Specifications

Frequency	470-860MHz
VSWR	≤ 1.10
Distribution loss	3.0 ± 0.3 dB
Isolation	≥ 30 dB minimum
Max RMS Output Power	20K W
Phase Response	$0^\circ \pm 90^\circ (\pm 1^\circ)$
Impedance	50 Ω

Environmental Specifications

Operating Temperature Range	-5°C to +55°C
Storage Temperature Range	-40°C to +85°C
Relative Humidity	5% - 95%
Barometric Pressure	55 KPa -106KPa

Mechanical Specifications

Connectors type	1 5/8" EIA	200812.01
Weight	10kg	
Outer Dimension (mm)	286.3 * 120.4 * 102.6mm	
Packing	1 Piece per box	

anywavecom.net

300 Knightsbridge Parkway | Suite 150 | Lincolnshire | IL | 60069

Phone: +1 (847) 415 2258


Fax: +1 (847) 415 2112

Hybrid Combiner (15kW)

Product Specifications

HC-15K-UHF-158

Part Number: 200812.01

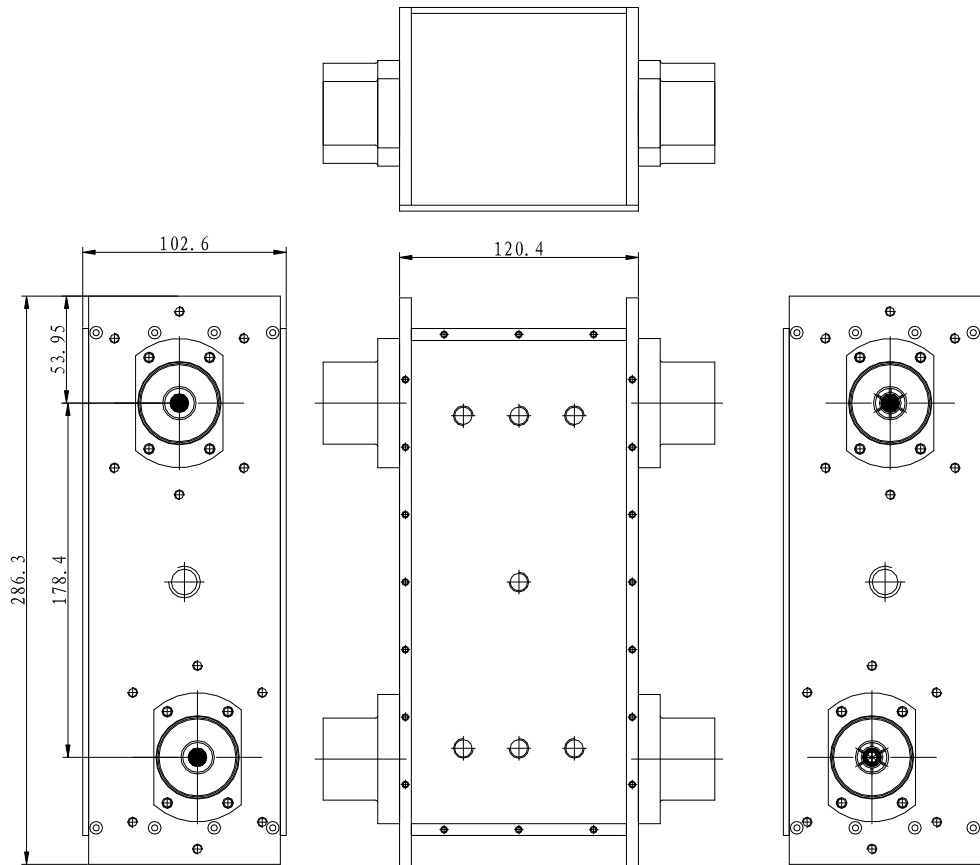

anywavecom.net

300 Knightsbridge Parkway | Suite 150 | Lincolnshire | IL | 60069

Phone: +1 (847) 415 2258

Fax: +1 (847) 415 2112